



OPRAWY SUFITOWE CEILING LUMINARIES / DECKENLEUCHTEN


OPRAWA PANELOWA LED LED PANEL LUMINAIRE LED PANELEINLEGELEUCHTE

PC HL




DESCRIPTION / BESCHREIBUNG / DANE OPRAWY

W	Power / Leistung / Moc	40 W
lm	Flux / Lichtstrom / Strumień	4800 lm
∠	Beam angle / Abstrahlwinkel / Kąt	120°
CRI	CRI	Ra > 80
UGR	UGR	<19
V	AC	200-240V
Control	Control / Steuerung / Sterowanie	ON/OFF
Optional	Optional / Wahlweise / Opcjonalnie	DALI
IP	Protection / Schutzart / Szczelność	IP 20
Housing	Housing / Gehäuse / Obudowa	aluminium / PCV
Color	Color / Farbe / Kolor	<input type="checkbox"/> white
Fixing	Fixing / Montaż	recessed / podtynkowy pendant / zwieszany

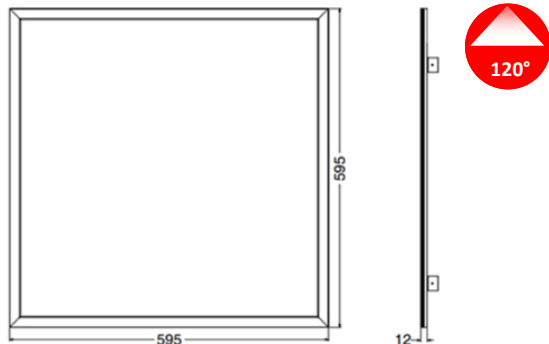

COLOR / FARBE / BARWA [K]

W	3000 K
D	4000 K
A	5000 K
B	5700 K

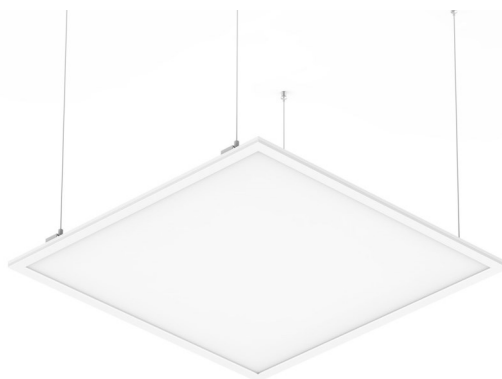

INDEX SYSTEM

	POWER	TEMP	CONTROL
PCHL	40	K	DALI
	W	OPTIONAL FEATURES WAHLWEISE / OPCJONALNIE	
	D		
	A		
	B		

